

IP20 FLEXIBLE LED TAPE

IN-FLEX 208

INNER LED

12b Homecroft Road, Sydenham, SE26 5QG
W innerled.co.uk E sales@innerled.co.uk
Tel 01883 592249



12.7W/M



up to
1995LM/M



IP20



Recycleable
Cardboard



>80Ra



2700K, 3000K
4000K, 6000K



38.45mm
Cut Points



FEATURES

- Available in four different colour temperatures
- Industrial grade adhesive backing tape
- Humidity 40% - 70% RH
- Working temperature -20°C - +45°C
- High efficacy
- 3 years warranty

SPECIFICATIONS

Voltage	24VDC 12.7	24VDC 12.7	24VDC	24VDC 12.7
Power Consumption	W/M	W/M	12.7 W/M	W/M
Lumen Output	1890LM/M	1940LM/M	1995LM/M	1995LM/M
Efficacy	149LM/W	153LM/W	157LM/W	157LM/W
Tone (CCT)	2700K ●	3000K ●	4000K ●	6000K ●
LED/metre	208	208	208	208
LED Pitch	4.81mm	4.81mm	4.81mm	4.81mm
Cut Points	38.45mm	38.45mm	38.45mm	38.45mm
CRI	>80Ra	>80Ra	>80Ra	>80Ra
IP Rating	20	20	20	20
Dimensions	5000 x 8 x 1.2mm	5000 x 8 x 1.2mm	5000 x 8 x 1.2mm	5000 x 8 x 1.2mm



2700K



3000K



4000K



6000K

IP20 FLEXIBLE LED TAPE

IN-FLEX 208

INNER LED

12b Homecroft Road, Sydenham, SE26 5QG
W innerled.co.uk E sales@innerled.co.uk
Tel 01883 592249

COMPATIBILITY



CONTROL METHODS

- Bluetooth (Apps, Voice Control) - BLE-15A
- Remote Control - SCD107W

SUGGESTED DRIVERS

Up to 1 M

Power supplied from
ONE end

Non Dimmable

PCV2420

Mains Dimmable

UVC2425TD

DALI Dimmable

DA-30-24

Up to 5 M

Power supplied from
ONE end

Non Dimmable

PCV2475

Mains Dimmable

UVC24100TD

DALI Dimmable

DA-75-24

Up to 10 M

Power supplied from
the **MIDDLE** or **BOTH** ends

Non Dimmable

PCV24151

Mains Dimmable


UVC24200ETD

DALI Dimmable

ELG-150-24DA

*Other options available. Contact us for more information.

MECHANICAL DIAGRAM

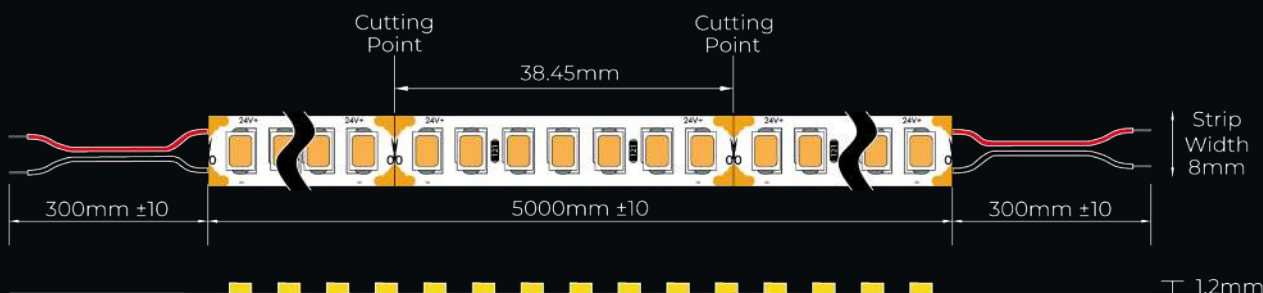

IP65 FLEXIBLE LED TAPE

IN-FLEX 208

INNER LED

12b Homecroft Road, Sydenham, SE26 5QG
W innerled.co.uk E sales@innerled.co.uk
Tel 01883 592249



12.7W/M



up to
1815LM/M



IP65



Recycleable
Cardboard



>80Ra



3000K, 4000K
6000K



38.45mm
Cut Points



FEATURES

- Available in three different colour temperatures
- Industrial grade adhesive backing tape
- Humidity 40% - 70% RH
- Working temperature -20°C - +45°C
- High efficacy
- 3 years warranty

SPECIFICATIONS

Voltage	24VDC 12.7	24VDC	24VDC 12.7
Power Consumption	W/M	12.7 W/M	W/M
Lumen Output	1777LM/M	1777LM/M	1815LM/M
Efficacy	140LM/W	140LM/W	143LM/W
Tone (CCT)	3000K ●	4000K ●	6000K ●
LED/metre	208	208	208
LED Pitch	4.81mm	4.81mm	4.81mm
Cut Points	38.45mm	38.45mm	38.45mm
CRI	>80Ra	>80Ra	>80Ra
IP Rating	65	65	65
Dimensions	5000 x 8 x 2.2mm	5000 x 8 x 2.2mm	5000 x 8 x 2.2mm



3000K



4000K



6000K

IP65 FLEXIBLE LED TAPE

IN-FLEX 208

INNER LED

12b Homecroft Road, Sydenham, SE26 5QG
W innerled.co.uk E sales@innerled.co.uk
Tel 01883 592249

COMPATIBILITY



CONTROL METHODS

- Bluetooth (Apps, Voice Control) - BLE-15A
- Remote Control - SCD107W

SUGGESTED DRIVERS

Up to 1 M

Power supplied from
ONE end

Non Dimmable

PCV2420

Mains Dimmable

UVC2425TD

DALI Dimmable

DA-30-24

Up to 5 M

Power supplied from
ONE end

Non Dimmable

PCV2475

Mains Dimmable

UVC24100TD

DALI Dimmable

DA-75-24

Up to 10 M

Power supplied from
the **MIDDLE** or **BOTH** ends

Non Dimmable

PCV24151

Mains Dimmable

UVC24200ETD

DALI Dimmable

ELG-150-24DA

*IP rated and other options available. Contact us for more information.

MECHANICAL DIAGRAM

