

IN-FLEX 80

FLEXIBLE LED TAPE

INNER LED

12b Homecroft Road, Sydenham, SE26 5QG
W innerled.co.uk E sales@innerled.co.uk
Tel 01883 592249



4W/M



up to 665LM/M




IP20



IP65

FEATURES

- Available in four different colour temperatures
- Fitted with adhesive backing tape
- Supplied on cardboard reels
- High efficacy
- Working temperature -20°C - +45°C
- Humidity 40% - 70% RH
- 5 years warranty

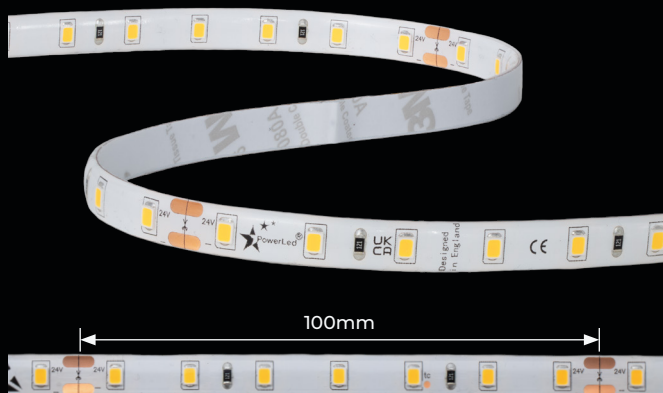

SPECIFICATIONS

Voltage	24VDC	24VDC	24VDC	24VDC
Power Consumption	4W/M	4W/M	4W/M	4W/M
Lumen Output	630LM/M	650LM/M	665LM/M	665LM/M
Efficacy	158LM/W	162LM/W	166LM/W	166LM/W
Tone (CCT)	2700K	3000K	4000K	6000K
LED/metre	80	80	80	80
LED Pitch	12.5mm	12.5mm	12.5mm	12.5mm
Cut Points	100mm	100mm	100mm	100mm
CRI	>80Ra	>80Ra	>80Ra	>80Ra
IP Rating	20	20	20	20
Dimensions	5000 x 8 x 1.2mm	5000 x 8 x 1.2mm	5000 x 8 x 1.2mm	5000 x 8 x 1.2mm

SPECIFICATIONS

Voltage	24VDC	24VDC	24VDC
Power Consumption	4W/M	4W/M	4W/M
Lumen Output	592LM/M	592LM/M	605LM/M
Efficacy	148LM/W	148LM/W	151LM/W
Tone (CCT)	3000K	4000K	6000K
LED/metre	80	80	80
LED Pitch	12.5mm	12.5mm	12.5mm
Cut Points	100mm	100mm	100mm
CRI	>80Ra	>80Ra	>80Ra
IP Rating	65	65	65
Dimensions	5000 x 8 x 2.2mm	5000 x 8 x 2.2mm	5000 x 8 x 2.2mm

IN-FLEX 80

FLEXIBLE LED TAPE

INNER LED

12b Homecroft Road, Sydenham, SE26 5QG
W innerled.co.uk E sales@innerled.co.uk
Tel **01883 592249**

COMPATIBLE WITH



DALI



DALI 2



0-10V Dimming



Mains Dimming
(Triac)



BLE Bluetooth



DMX



Zigbee



SILVAIR



CASAMBI



Google Home




Meta



Alexa

MECHANICAL DIAGRAMS

IP Rating 20

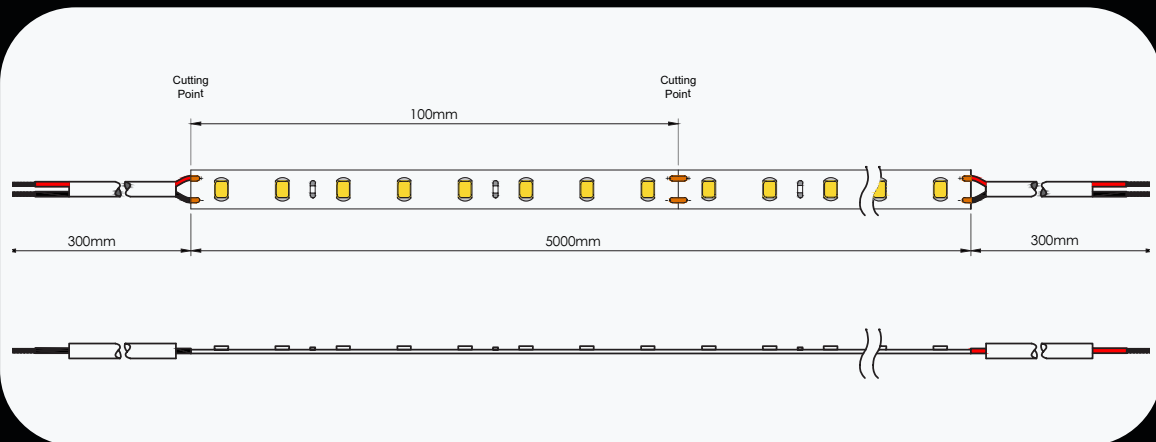

IP Rating 65

