


RUN UP TO 15 METRES FROM ONE DRIVER

IN-RGB+W 48-100-20



19.2W/M




up to
850LM/M




IP20



Colour
Changing



15M Reel



100mm
Cut Points



FEATURES

- Up to 15 metres of illumination, powered from one end or 30 metres powered from the middle
- Colour Changing RGB + Single Colour White
- Supplied on recyclable cardboard reels
- Industrial grade adhesive backing tape
- Working temperature -20°C - +40°C
- High efficacy
- 3 years warranty

SPECIFICATIONS

Voltage	48VDC	48VDC	48VDC	48VDC
Power Consumption	19.2W/M	19.2W/M	19.2W/M	19.2W/M
Lumen Output	850LM/M	850LM/M	850LM/M	850LM/M
Tone (CCT)	RGB+2700K	RGB+3000K	RGB+4000K	RGB+6000K
LED/metre	100+100	100+100	100+100	100+100
Cut Points	100mm	100mm	100mm	100mm
IP Rating	20	20	20	20
Dimensions	15000 x 12 x 1.8mm	15000 x 12 x 1.8mm	15000 x 12 x 1.8mm	15000 x 12 x 1.8mm



RGB

2700K

3000K

4000K

6000K

RUN UP TO 15 METRES FROM ONE DRIVER

IN-RGB+W 48-100-20


INNER LED

12b Homecroft Road, Sydenham, SE26 5QG
W innerled.co.uk **E** sales@innerled.co.uk
Tel 01883 592249

COMPATIBILITY



MECHANICAL DIAGRAM

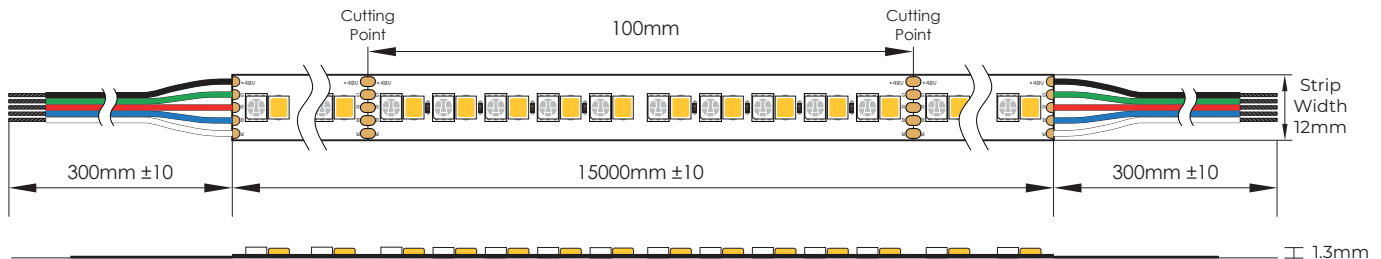


CONTROL METHODS (sold separately)


- Remote Control
- Bluetooth (Apps, Voice Control)
- Sound Reactive (colour changing, dimming)
- Hard-wired wall-mounted controller
- RF wall-mounted or remote controlled

CONNECTORS (sold separately)


WIRE TO WIRE

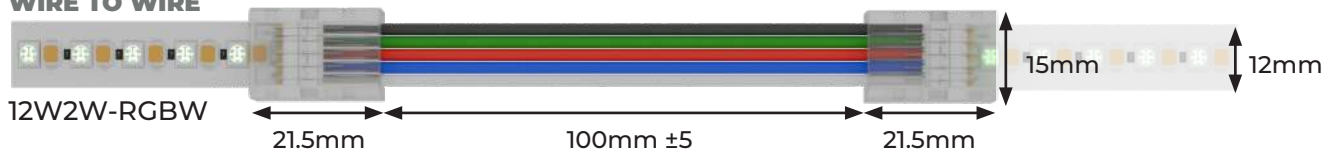

TAPE TO DRIVER

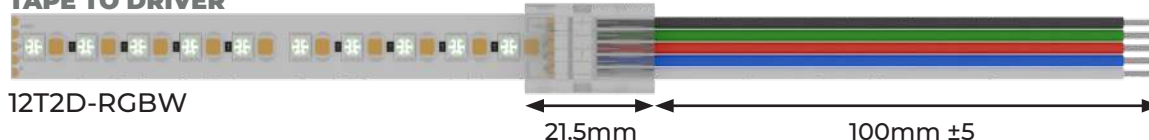

TAPE TO TAPE

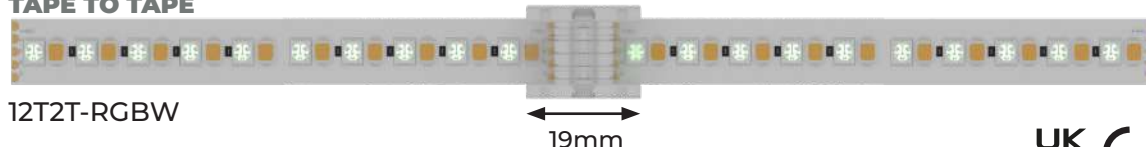

RUN UP TO 15 METRES FROM ONE DRIVER


IN-RGB+W 48-100-65

INNER LED

12b Homecroft Road, Sydenham, SE26 5QG
W innerled.co.uk **E** sales@innerled.co.uk
Tel 01883 592249



19.2W/M



up to
850LM/M




IP65



Colour
Changing



15M Reel



100mm
Cut Points



FEATURES

- Up to 15 metres of illumination, powered from one end or 30 metres powered from the middle
- Colour Changing RGB + Single Colour White
- Supplied on recyclable cardboard reels
- Industrial grade adhesive backing tape
- Working temperature -20°C - +40°C
- High efficacy
- 3 years warranty

SPECIFICATIONS

	48VDC	48VDC	48VDC
Voltage	48VDC	48VDC	48VDC
Power Consumption	19.2W/M	19.2W/M	19.2W/M
Lumen Output	765LM/M	765LM/M	765LM/M
Tone (CCT)	RGB+3000K	RGB+4000K	RGB+6000K
LED/metre	100+100	100+100	100+100
Cut Points	100mm	100mm	100mm
IP Rating	65	65	65
Dimensions	15000 x 12 x 3mm	15000 x 12 x 3mm	15000 x 12 x 3mm



RUN UP TO 15 METRES FROM ONE DRIVER

IN-RGB+W 48-100-65

INNER LED

12b Homecroft Road, Sydenham, SE26 5QG


W innerled.co.uk E sales@innerled.co.uk

Tel 01883 592249

COMPATIBILITY



MECHANICAL DIAGRAM

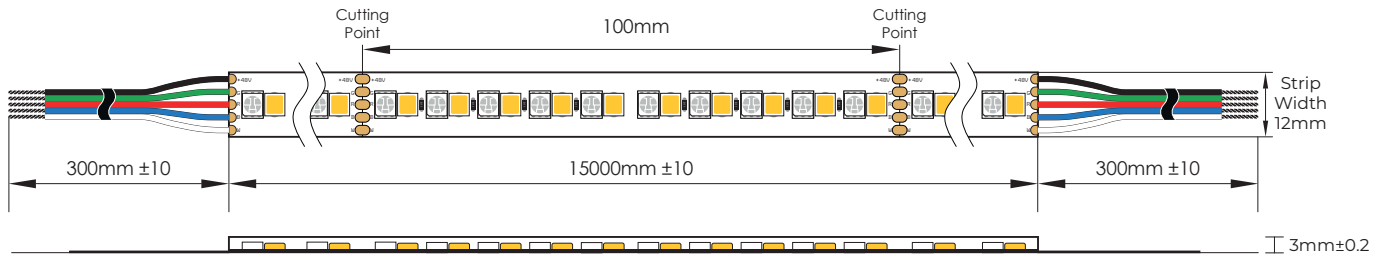

CONTROL METHODS (sold separately)

Remote Control

Bluetooth (Apps, Voice Control)


Sound Reactive (colour changing, dimming)

Hard-wired wall-mounted controller


RF wall-mounted or remote controlled

CONNECTORS (sold separately)

WIRE TO WIRE

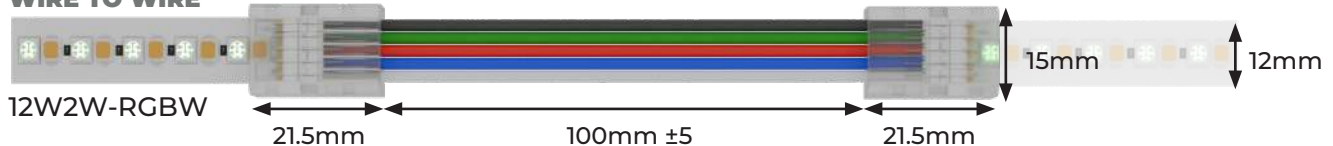

TAPE TO DRIVER

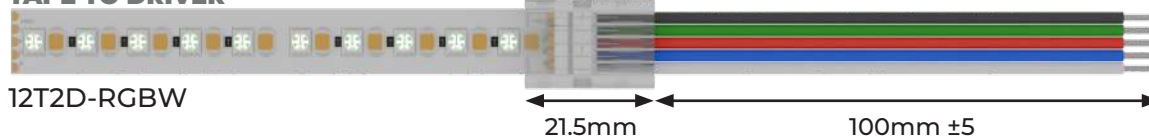

TAPE TO TAPE

