

BATTEN

LED LIGHT BATTEN



- 4000K single colour
- 120° Light distribution
- Up to 120lm/W
- IP65 Ingress protected
- Excellent optical design
- Impact tested to IK08
- Surface and pendant mounting for ease of installation
- Available in single and twin variations: 4ft, 5ft and 6ft
- Emergency versions available



SPECIFICATION

Part Code	BAT-B4S25-4K	BAT-B4T50-4K	BAT-B5S35-4K
Lumens	3000lm	6000lm	4200lm
Input Voltage	220~240VAC	220~240VAC	220~240VAC
Power	25W	50W	35W
Power Factor	>0.9	>0.9	>0.9
Colour	4000K	4000K	4000K
CRI	>80	>80	>80
Working Temperature	-20°C~45°C	-20°C~45°C	-20°C~45°C
Beam Angle	120°	120°	120°
Dimensions	1263 x 85 x 78mm	1265 x 130 x 78mm	1563 x 85 x 78mm
	Replacement for 1 x 36W	Twin replacement for 2 x 36W	Replacement for 1 x 58W

Part Code	BAT-B5T70-4K	BAT-B6S40-4K	BAT-B6T80-4K
Lumens	8400lm	4800lm	9600lm
Input Voltage	220~240VAC	220~240VAC	220~240VAC
Power	70W	40W	80W
Colour	4000K	4000K	4000K
CRI	>80	>80	>80
Working Temperature	-20°C~45°C	-20°C~45°C	-20°C~45°C
Beam Angle	120°	120°	120°
Dimensions	1563 x 130 x 78mm	1863 x 85 x 78mm	1863 x 130 x 78mm
	Twin replacement for 2 x 58W	Replacement for 1 x 70W	Twin replacement for 2 x 70W



INNER LED


12b Homecroft Road, Sydenham, SE26 5QG
W innerled.co.uk E sales@innerled.co.uk
Tel 01883 592249

BATTEN


LED LIGHT BATTEN

Mechanical Diagrams

SINGLE

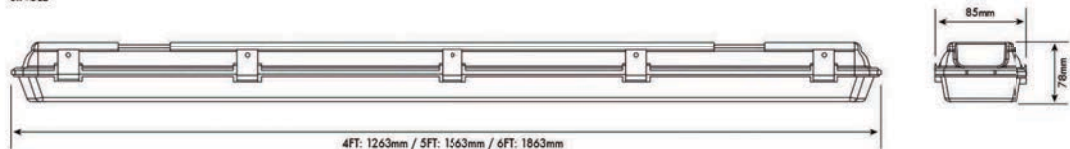

TWIN

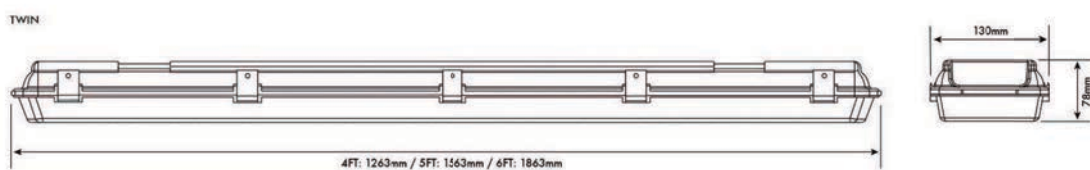

INNER LED

12b Homecroft Road, Sydenham, SE26 5QG
W innerled.co.uk E sales@innerled.co.uk
Tel 01883 592249